



Corrigendum-2

Dt. 27.02.2026

Tender Ref: TPCODL/P&S/1000008102 /2025-26

Name of Tender: Open Tender for Supply and Installation of 11kV, LT lines and DT Substations for providing power supply to Un-electrified households under PM-AJAY & DA-JGUA scheme and Additional households under BGJY scheme on turnkey basis.

This corrigendum is issued for the following changes,

The additional line item, “DT S/s Fencing for 63 KVA DTR,” is hereby included and shall be part of the “*Schedule of Items (Annexure I)*” of the aforementioned tender for price bidding. The details of the item is provided below,

Sl. No.	Item Description	Unit	Qty	Unit Rate (Excl. GST) (In Rs.)	GST on Unit Price (In Rs.)	Unit Rate (Incl. GST) (In Rs.)	Total Amount (In Rs.)
	Service / Erection						
66	DT S/s Fencing (GI barbed wire fencing 5mtr x 4mtr height 1.8 mtr with GI grill Gate) for 63 KVA & above capacity of DTR only (As per the drawing)	No	80				

All prospective bidders are requested to take note of the revision as mentioned above and submit their Price bids accordingly. The Revised Price Schedule Format and Fencing Drawing are attached.

All other terms and conditions of the tender shall remain unchanged.

Sd/-

Head (Procurement & Store)

ANNEXURE I							
Schedule for Items (BOQ) (Revised)							
Rate to be quoted as per BOQ given below:							
Supply and Installation of 11kV, LT lines and DT Substations for providing power supply to Un-electrified households under PM-AJAY & DA-JGUA scheme and Additional households under BGJY scheme on turnkey (Tender No.: TPCODL/P&S/2025-26/ 1000008102)							
Sl. No.	Item Description	Unit	Qty	Unit Rate (Excl. GST) (In Rs.)	GST on Unit Price (In Rs.)	Unit Rate (Incl. GST) (In Rs.)	Total Amount (In Rs.)
a	b	c	d	e	f	g= e+f	h= dxg
	Supply						
1	9 Mtr. long 300 Kg. PSC Pole	No	2720				
2	11KV V Cross Arm (10.2 Kg each) (GI)	No	1760				
3	Top Bracket 75x40mm GI Channel (1.3kg each)	No	1760				
4	GI Back Clamp for V Cross arm (11KV) (0.85 Kg each)	No	1760				
5	11KV Pin Insulator polymer	No	7520				
6	11KV HW fitting (B&S) 70KN for 55mm ² AAAC	No	2880				
7	Disc Insulator (B&S) 70KN Polymer	No	2880				
8	HT Stay Set 18 mm	Set	960				
9	HT Stay insulator (140x85 mm)	No	960				
10	HT Stay Clamp (1.9Kg / Pair)	Pair	960				
11	7/10 SWG G I Stay Wire	Kg	6720				
12	Earthing Coil	No	14952				
13	55mm ² All Aluminium Alloy Conductor (AAAC)	Mtr	324288				
14	Barbed wire/ Anticlimbing device	Kg	8160				
15	100x50x6 mm GI Channel (9.2Kg / Mtr)	Kg	21858.56				
16	Nuts & Bolts of Assorted size	Kg	32151.488				
17	Danger Board	No	2720				

Sl. No.	Item Description	Unit	Qty	Unit Rate (Excl. GST) (In Rs.)	GST on Unit Price (In Rs.)	Unit Rate (Incl. GST) (In Rs.)	Total Amount (In Rs.)
18	GI Back clamp for Danger place and anticlimbing Device	Kg	4082.88				
19	Wadge Connector	No	8160				
20	Poly carbonate bird guard	No	12480				
21	No. 8 GI wire	Kg	544.96				
22	200Kg PSC pole 8Mtr long	No	13192				
23	Eye Hook for AB cable	No	26384				
24	Pole clamp for Eye hook (AB Cable)	Pair	26384				
25	8 SWG GI wire 0.116 Kg / Mtr-2Mtr. For connecting pole with coil earthing	Kg	2986.304				
26	LT Conductor dead end clamp (ABC)	No	26384				
27	Insulated Piercing connector Type-A -main 16 to 95 sq.mm & Tap-16 to 95 sq.mm	No	21816				
28	LT Stay Set 16mm	Set	12872				
29	LT Stay insulator (110 x 75) mm	No	12872				
30	LT Stay Clamp (1.40 Kg / Pair)	Pair	12872				
31	7/12 SWG G I stay wire	Kg	51488				
32	1x35+1x25mm2 AB Cable	Mtr	352901				
33	3x35+1x25mm2 AB Cable	Mtr	126504				
34	3x50+1x35mm2 AB Cable	Mtr	61320				
35	LT cable rising channel 75x40x4.8 (GI)	Kg	6854.4				
36	Top Channel 100x50x6 (GI)	Kg	18355.2				
37	Fish plate 50x6 (GI)	Kg	1267.2				
38	AB Switch mounting Channel 75x40x4.8 (GI)	Kg	13708.8				




Sl. No.	Item Description	Unit	Qty	Unit Rate (Excl. GST) (In Rs.)	GST on Unit Price (In Rs.)	Unit Rate (Incl. GST) (In Rs.)	Total Amount (In Rs.)
39	AB Switch support Channel 100x50x6 (GI)	Kg	2140.8				
40	Channel support for down pipe 75x40x4.8 (GI)	Kg	1827.2				
41	HG fuse mounting Channel 75x40x4.8 (GI)	Kg	13708.8				
42	Cantilever support Channel 75x40x4.8 (GI)	Kg	3702.4				
43	Cantilever support Angle 50x50x6 (GI)	Kg	3692.8				
44	Transformer base Channel 100x50x6 (GI)	Kg	18355.2				
45	Transformer base support Channel 100x50x6 (GI)	Kg	3152				
46	Transformer belting Angel 50x50x6 (GI)	Kg	8640				
47	Transformer belting support Angel 50x50x6 (GI)	Kg	1670.4				
48	LT DB mounting Angle 50x50x6 (GI)	Kg	2880				
49	50x6 mm GI Flat for DEarthing	Kg	49542.4				
50	AB Switch (11KV, 200A, 3Pole, 50Hz)	Set	320				
51	H.G Fuse (11KV, 200A, 3Pole) with PI	Set	320				
52	Lightening Arrester (9KV, 10KA)	No	960				
53	40mm dia GI pipe earthing device 3 mtr. Long	No	2240				
54	25 KVA, 11/0.4KV (AL) Transformer (level II) (As per Technical Specification)	No	240				
55	LT Distribution Box for 25 KVA S/S	No	240				
56	35mm ² 4 core LT XLPE armoured cable	Mtr	12000				
57	63 KVA, 11/0.4KV (AL) Transformer (level II) (As per Technical Specification)	No	80				
58	LT Distribution Box for 63 KVA S/S	No	80				
59	4 core 95mm ² LT XLPE armoured cable	Mtr	4400				

Sl. No.	Item Description	Unit	Qty	Unit Rate (Excl. GST) (In Rs.)	GST on Unit Price (In Rs.)	Unit Rate (Incl. GST) (In Rs.)	Total Amount (In Rs.)
60	Yellow paint for background	Ltr	320				
61	Black paint	Ltr	320				
	Service / Erection						
1	Concreting for PSC pole including muffing ratio PCC - 1:2:4 (3.14X250mm)(250mmX1700mm) – (Volume of Pole inside Concrete) = 0.3Cu.mtr. , 2 Pole Concreting	CuM	4773.6				
2	Concreting of Stay 500mmX500mm X800mm = 0.2Cu.mtr.-PCC 1:2:4), 2stay concreting	CuM	2766.4				
3	Breaking of concrete by mechanical/ manual of size 1.5 x0.5 x 0.5 Mtr for Erection of 8 Mtr LT pole	No	62				
4	Construction of Earthing chamber including installation of earthing pipe, making earthing chamber including excavation, soil treatment will Banocide power, calculator of earth resistance including installation of 3Mtr. GI pipe 40mm/50mm including welding of GI flat.	No	2240				
5	Laying 4 core 35mm ² LT XLPE armoured Cable	Mtr	12000				
6	Laying 4 core 95mm ² LT XLPE armoured Cable	Mtr	4400				
7	Erection of 9 Mtr. long 300 Kg. PSC Pole	No	2720				
8	Erection of 11KV V Cross Arm (10.2 Kg each) (GI)	No	1760				
9	Erection of Top bracket 75x40mm GI Channel (1.3kg each)	No	1760				
10	Erection of GI Back Clamp for V Cross arm (11KV) (0.85 kg each)	No	1760				
11	Erection of 11KV Pin insulator Polymer	No	7520				
12	Erection of 11KV H W fitting(B&S) 70KN for 55mm ² AAAC	No	2880				
13	Erection of Disc insulator (B&S) 70KN Polymer	No	2880				
14	Erection of HT Stay Set 18 mm	Set	960				
15	Erection of HT stay insulator (140x85 mm)	No	960				
16	Erection of HT Stay Clamp (1.9Kg / Pair)	Pair	960				
17	Erection of 7/10 SWG G I stay wire	Kg	6720				




Sl. No.	Item Description	Unit	Qty	Unit Rate (Excl. GST) (In Rs.)	GST on Unit Price (In Rs.)	Unit Rate (Incl. GST) (In Rs.)	Total Amount (In Rs.)
18	Erection of Earthing Coil	No	14890				
19	Stringing of 55mm ² All Aluminium Alloy Conductor (AAAC)	Mtr	324288				
20	Barbed wire/Anticlimbing device	Kg	8160				
21	Erection of 100x50x6 mm MS Channel (9.2Kg. / Mtr)	Kg	21858.56				
22	Erection of Nuts & Bolts of Assorted size	Kg	32151.49				
23	Erection of Danger Board	No	2720				
24	Erection of Back clamp for Danger place and anticlimbing Device	Kg	4082.88				
25	Erection of Wadge Connector	No	8160				
26	Erection of Poly carbonate bird guard	No	12480				
27	Erection of No. 8 GI wire	Kg	544.96				
28	Erection of 200Kg PSC pole 8Mtr long	No	13130				
29	Erection of Eye Hook for AB cable	No	26384				
30	Erection of Pole clamp for Eye hook (AB Cable)	Pair	26384				
31	Erection of 8 SWG GI wire 0.116 Kg / Mtr-2Mtr. For connecting pole with coil earthing	Kg	2986.304				
32	Erection of LT Conductor dead end clamp (ABC)	No	26384				
33	Erection of Insulated Piercing connector Type-A -main 16 to 95 sq.mm & Tap-16 to 95 sq.mm	No	21816				
34	Erection of LT Stay Set 16mm	Set	12872				
35	Erection of LT Stay insulator (110 x 75) mm	No	12872				
36	Erection of LT Stay Clamp (1.40 Kg / Pair)	Pair	12872				
37	Erection of 7/12 SWG G I stay wire	Kg	51488				
38	Stringing of 1x35+1x25mm ² AB cable	Mtr	352901				

Sl. No.	Item Description	Unit	Qty	Unit Rate (Excl. GST) (In Rs.)	GST on Unit Price (In Rs.)	Unit Rate (Incl. GST) (In Rs.)	Total Amount (In Rs.)
39	Stringing of 3x35+1x25mm ² AB cable	Mtr	126504				
40	Stringing of 3x50+1x35mm ² AB cable	Mtr	61320				
41	Erection of LT cable rising channel 75x40x4.8 (GI)	Kg	6854.4				
42	Erection of Top Channel 100x50x6 (GI)	Kg	18355.2				
43	Erection of Fish plate 50x6 (GI)	Kg	1267.2				
44	Erection of AB Switch mounting channel 75x40x4.8 (GI)	Kg	13708.8				
45	Erection of AB Switch support channel 100x50x6 (GI)	Kg	2140.8				
46	Erection of Channel support for down pipe 75x40x4.8 (GI)	Kg	1827.2				
47	Erection of HG fuse mounting channel 75x40x4.8 (GI)	Kg	13708.8				
48	Erection of Cantilever support channel 75x40x4.8 (GI)	Kg	3702.4				
49	Erection of Cantilever support Angle 50x50x6 (GI)	Kg	3692.8				
50	Erection of Transformer base channel 100x50x6 (GI)	Kg	18355.2				
51	Erection of Transformer base support channel 100x50x6 (GI)	Kg	3152				
52	Erection of Transformer belting angel 50x50x6(GI)	Kg	8640				
53	Erection of Transformer belting support angel 50x50x6(GI)	Kg	1670.4				
54	Erection of LT DB mounting angle 50x50x6(GI)	Kg	2880				
55	Erection of 50x6 mm GI plat for earthing (GI)	Kg	49542.4				
56	Erection of AB Switch (11KV, 200A, 3Pole,50Hz)	Set	320				
57	Erection of H.G Fuse (11KV, 200A, 3Pole) with PI	Set	320				
58	Erection of Lightening Arrester (9KV, 10KA)	No	960				
59	Erection of 40mm dia GI pipe earthing device 3 mtr. Long	No	2240				

Sl. No.	Item Description	Unit	Qty	Unit Rate (Excl. GST) (In Rs.)	GST on Unit Price (In Rs.)	Unit Rate (Incl. GST) (In Rs.)	Total Amount (In Rs.)
60	Erection of 25 KVA,11/0.4KV(AL) Transformer (level II)	No	240				
61	Erection of LT Distribution Box for 25 KVA S/S	No	240				
62	Erection of 63 KVA,11/0.4KV (AL) Transformer (level II)	No	80				
63	Erection of LT Distribution Box for 63 KVA S/S.	No	80				
64	Erection of Yellow paint (GIS numbering & Zebra Striping) for background	Ltr	320				
65	Erection of Black paint (GIS numbering & Zebra Striping)	Ltr	320				
66	DT S/s Fencing (GI barbed wire fencing 5mtr x 4mtr height 1.8 mtr with GI grill Gate) for 63 KVA & above capacity of DTR only (As per the drawing)	No	80				
	Total						
	Figures : RupeesOnly						
	Price shall be quoted considering item description, technical specification and approved make as specified in the tender.						
	The bidders are advised to quote prices strictly in the above format. Failing to do so, bids are liable for rejection.						
	Bidder should quote as per the "Item description" column. No cutting/ overwriting in the prices is permissible.						
	Mentioning "extra/inclusive" in any of the column may lead for rejection of the price bid.						
	Unit price of the price bid shall be considered from the bidder quotation and other than unit price viz items description, unit, qty, etc shall be consider as per the tender price schedule format.						
	The bids will be evaluated commercially on the overall all-inclusive price of tender BOQ as above.						
	All materials shall be supplied and erected by the BA on turnkey basis.						
	The unit price should be inclusive of freight, insurance and other levies (if any) and exclusive of GST. GST to be mentioned separately. Total price shall be inclusive of all.						
	There shall be no price variation during the Contract Period / Extended Contract Period.						

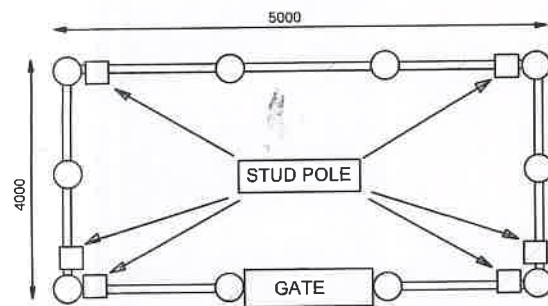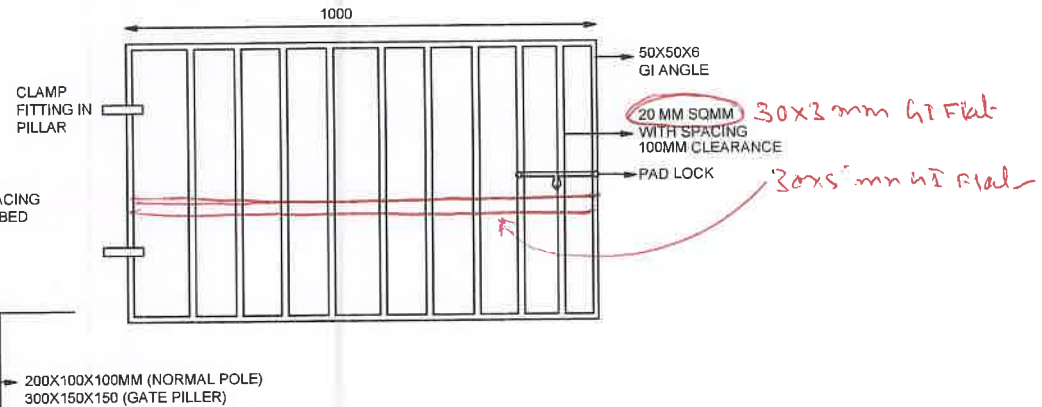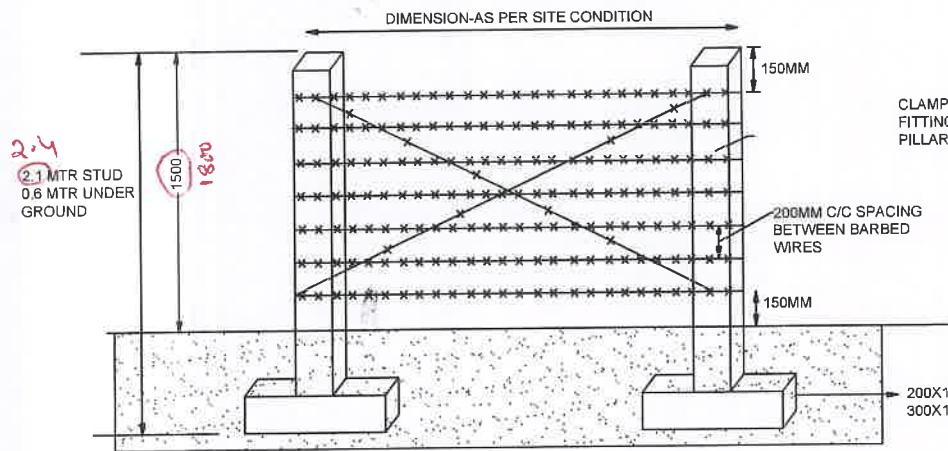

FOR GI HOOK
STRETCH

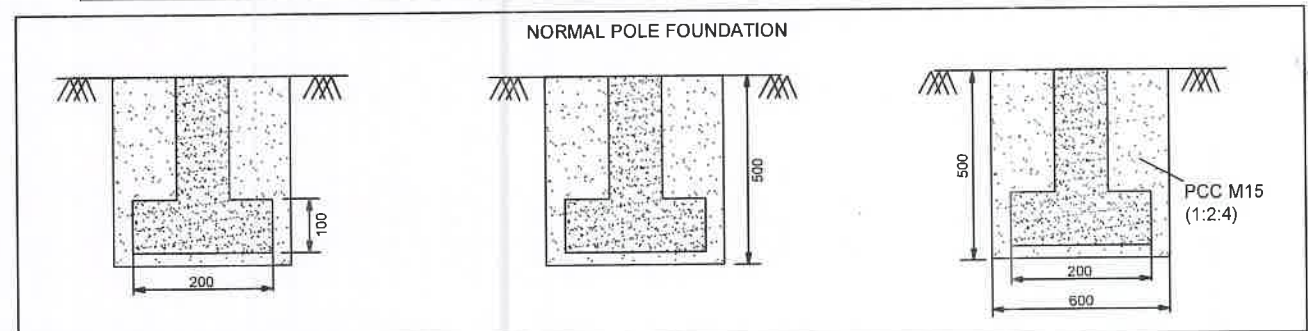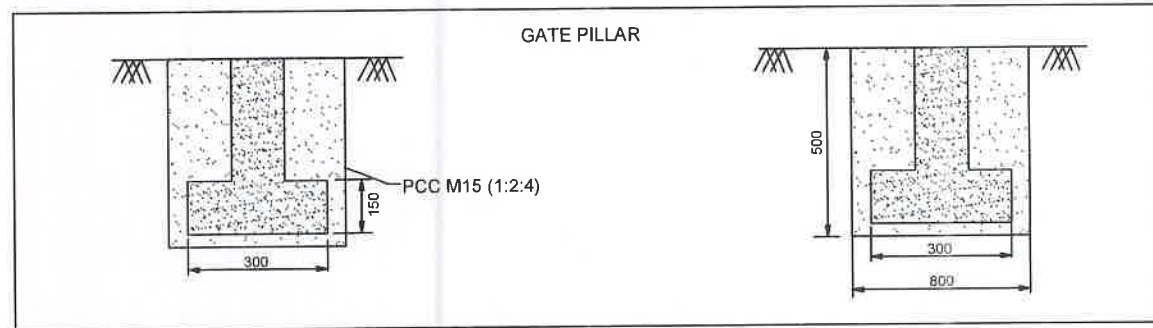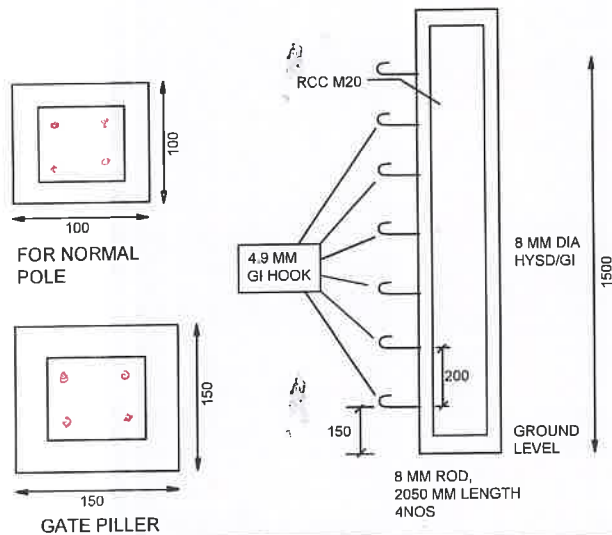

NOTE -

1. ALL DIMENSIONS ARE IN MM UNLESS SPECIFIED.
2. SPECIFICATION OF EARTH EXCAVATION FOR FENCING POST - EARTH EXCAVATION TO BE DONE - 600X500MM. PCC TO BE DONE WITH M15 (1:4:8) - 600X400 MM;
3. SPECIFICATION OF EARTH EXCAVATION FOR GATE PILLAR - EARTH EXCAVATION TO BE DONE - 800X400MM. PCC TO BE DONE WITH M15 (1:2:4) - 800X500 MM;
4. FURTHER CORNER POINTS SHALL HAVE 2 NOS ADDITIONAL POSTS TO SUPPLEMENT THE BEND AND USE AS ANCHORING.

BOQ -

1. NO OF POSTS - 8 NOS FOR FENCING + 6NOS FOR ANCHORING + 2 NOS FOR GATE PILLAR.
2. 2.5mm Line x 2.5mm point GI BARBED WIRE.
3. GATE - 1 NOS

TPCODL

TITLE BARBED WIRE FENCING				
PREPARED	CHECKED	APPROVED	DRAWING	SCALE 1:1
PRABHAT KUMAR	BIKRAM NAYAK	NANDISH N	SHEET	REV 00